


FINGER PROTECTION DEVICES

FP200 / FP200X

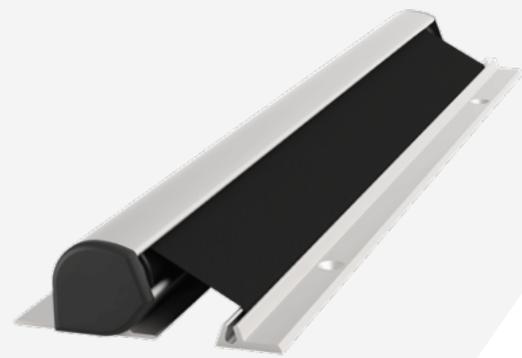

DESCRIPTION

Suitable for most **single and double action doors** including automatic doors, utilising a roller system to provide effective finger protection; preventing fingers being accidentally trapped on the hinge side of a door.

Featuring a sleek, easy to clean, aluminium housing. Strong **fire-retardant fabric** material is kept under constant tension, designed to cover the gap between the door and frame automatically when the door is opened.



Closed



Open

TECHNICAL DATA

Information	FP200	FP200X
Cycles of operations	1,000,000	-
Maximum length	2500mm	2500mm
Standard length	1925mm	2015mm
Minimum length	325mm	325mm
Maximum fabric travel	260mm	260mm
Additional Info	<ul style="list-style-type: none"> ➤ Suitable for use on 30min fire doors ➤ Class 2 - BS 8613:2017 Finger Protection for Pedestrian Doors ➤ EN16654:2015 Child Protection Products 	<ul style="list-style-type: none"> ➤ EN16005 compliant for automatic doors

HOUSING FINISH OPTIONS




FABRIC COLOUR



BESPOKE FINISHES

Housing RAL colour match available on request (POA).
Please contact us to enquire.

DIMENSIONS

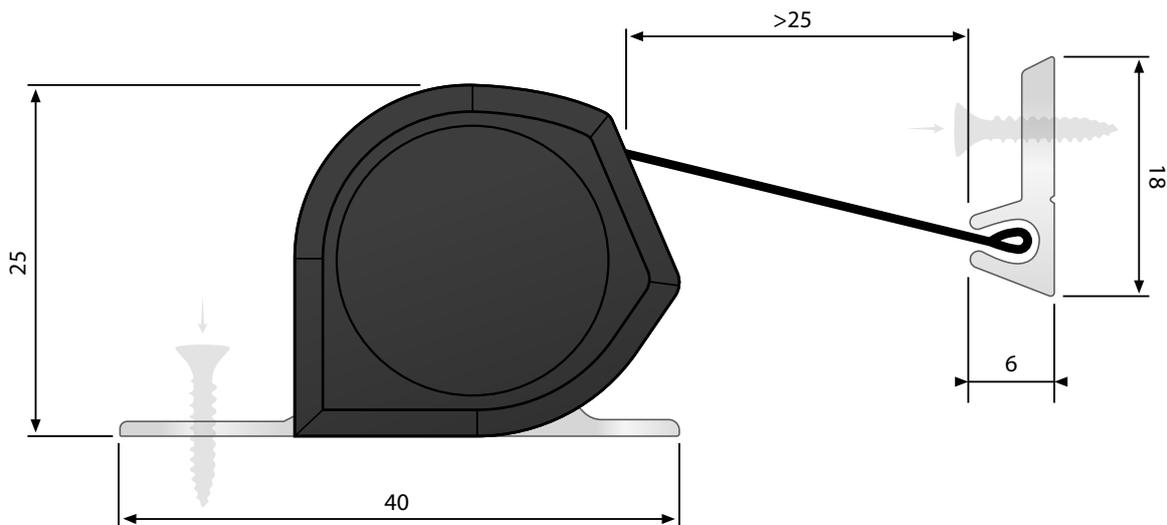

Awarded German Safety Mark and certified to EN16654

