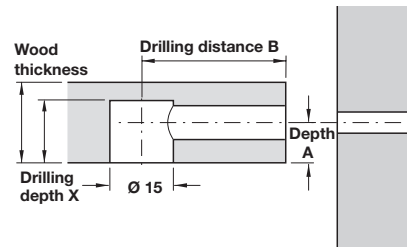


## IXCONNECT MINIFIX S100 STANDARD BOLTS

ixconnect

- > Minifix connecting bolts **A** with special thread can be screwed directly into a  $\varnothing 3$  mm pre-drilled hole or can be used in conjunction with a dowel which is pressed into a  $\varnothing 5$  mm pre-drilled hole
- > Minifix connecting bolts **B** with special threads can be screwed directly into a  $\varnothing 5$  mm pre-drilled hole
- > For single or double-sided constructions



**Cross slot**

Tighten with PZ2 screwdriver only (cross slot size 2)


**Combination slot**

Tighten with PZ2 screwdriver or flat bladed screwdriver

## Minifix S100 connecting bolt


**A**


- > Expanding sleeves and dowels for  $\varnothing 5$  mm holes are shown on pages **419-421**

- > For direct, screw-in installation in  $\varnothing 3$  mm holes or for press-fit installation in  $\varnothing 5$  mm holes when used with dowels
- > With special thread
- > Steel
- > Order qty: Multiples of 100 pcs

| Drilling distance B | 24 mm      | 34 mm      |
|---------------------|------------|------------|
| Bright              | -          | 262.28.017 |
| Galvanized          | 262.27.912 | 262.28.919 |

## Minifix S100 connecting bolt

**B**


- > Screw in sleeves and dowels with M6 internal thread are shown on page **420**

- > For direct, screw-in installation in  $\varnothing 5$  mm holes
- > With special thread
- > Steel
- > Order qty: Multiples of 100 pcs

| Drilling distance B        | 24 mm      | 34 mm      |
|----------------------------|------------|------------|
| <b>Thread length 8 mm</b>  |            |            |
| Bright                     | 262.27.020 | 262.28.020 |
| Galvanized                 | 262.27.920 | 262.28.920 |
| <b>Thread length 10 mm</b> |            |            |
| Bright                     | -          | 262.28.008 |
| <b>Thread length 11 mm</b> |            |            |
| Bright                     | 262.27.029 | -          |
| Galvanized                 | 262.27.921 | 262.28.928 |
| <b>Thread length 15 mm</b> |            |            |
| Bright                     | 262.27.234 | 262.28.231 |
| Galvanized                 | 262.27.832 | 262.28.839 |