


# STANDARD 110° HINGES




- > Opening angle 110° (can be reduced to 85° using angle restrictor, see page **398**)
- > Full overlay or half overlay/twin mounting
- > Sprung
- > Ø 35 mm cup
- > For door thickness up to 22 mm see table below
- > Screw fixing or dowel fixing cup
- > Click on arms
- > Soft close compatible
- > Nickel-plated pressed steel cup and arm
- > Order fixing screws separately for screw fixing versions
- > Order qty: 1 pc



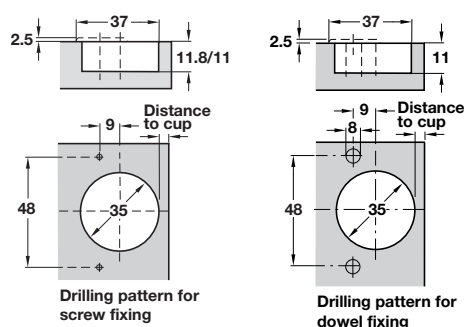

110° Hinge


Door thickness mm	Distance to cup E mm				
	3.0	4.0	5.0	6.0	7.0
16	0.5	0.5	0.5	0.5	0.5
18	1.0	1.0	1.0	1.0	1.0
19	1.2	1.2	1.2	1.2	1.2
20	2.2	1.5	1.5	1.5	1.5
22	4.7	3.7	2.8	2.1	2.1
Minimum gap					



## Full overlay mounting



Door overlay mm							
14	15	16	17	18	19	20	
			4	5	6	7	0
	4	5	6	7			2
Distance to cup E mm				Mounting plate distance mm			
							
Fixing				Click on			
Screw fixing				322.17.530			
Dowel fixing				322.17.580			

## Half overlay/twin mounting



Door overlay mm							
5	6	7	8	9	10	11	
				4	5	6	0
			4	5	6		2
Distance to cup E mm				Mounting plate distance mm			
							
Fixing				Click on			
Screw fixing				322.17.531			
Dowel fixing				322.17.581			

YOU ALSO NEED:


**MOUNTING PLATES**  
Pages 394-396

**FIXING SCREWS**  
Page 468

**OPTIONAL ACCESSORIES**  
Pages 397-399, 403-417