
## STANDARD POST HINGES



2.5 Distance to cup

Drilling pattern for screw fixing





- > Opening angle 95°
- > Sprung
- > Ø 35 mm cup
- > Screw fixing cup
- > Slide on or click on arms
- > Soft close compatible
- > Nickel-plated pressed steel cup, nickel-plated zinc alloy arm
- > Order fixing screws separately
- > Order qty: Multiples of 10 pcs

## Minimum gap

Door thickness mm	Distanc	Distance to cup E mm			
	3.0	4.0	5.0	6.0	
16	0.1	0.1	0.1	0.1	
18	0.2	0.2	0.2	0.2	
19	0.3	0.3	0.3	0.3	
20	0.4	0.4	0.4	0.4	
22	0.7	0.7	0.7	0.7	
24	1.0	1.0	1.0	1.0	
26	1.4	1.4	1.4	1.4	
28	1.9	1.9	1.9	1.9	
30	3.8	2.9	2.6	2.5	
	Minim	Minimum gap F			

## 95° Post hinge



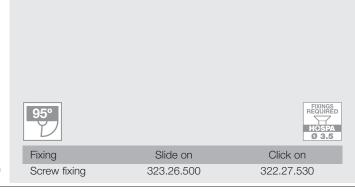

YOU ALSO NEED:






OPTIONAL ACCESSORIES
Pages 397-399, 403-417

## Super compact cruciform mounting plate





- > For Hospa screw fixing
- > Two part plate with external height adjustment
- > Nickel-plated zinc alloy and pressed steel
- > Order fixing screws separately
- > Order qty: Multiples of 10 pcs



BEST

 Height
 Click on 322.85.750
 Slide on 323.85.701

Click on

A wider range of mounting plates are shown on pages **394-396** 

Slide on