



TIOMOS PIE-CUT CORNER HINGE




- > For connecting two corner cabinet doors
- > Ø 35 mm cup
- > For door thickness up to 24 mm (factory setting is for 19 mm door thickness for 3.5 m cup distance)
- > Low cup drilling depth of 11.8 mm
- > Only available without soft close
- > Screw fixing cup
- > Click on arm
- > 3-dimensional adjustment with appropriate mounting plate
- > Zinc alloy cup and hinge arm
- > Note: Dimensions in drawings and tables are calculated using factory settings and for mounting plate distance 0 mm
- > Order fixing screws separately
- > Order qty: 1 pc



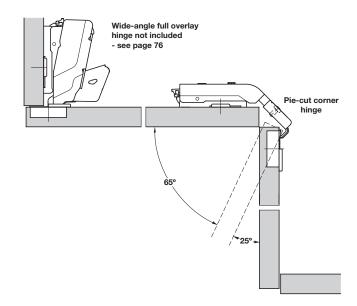





Mounting plate height 0 mm



Mounting plate height 0 mm




19 mm door thickness (factory setting) Mounting plate height 0 mm



Mounting plate height 0 mm



TIOMOS PCC Pie-Cut corner hinge, with full-cup drill hole



FIXINGS REQUIRED HOSPA Ø 3.5

Protective wheel for corner cabinets available, shown below

A wider range of mounting plates are shown

Soft close Screw fixing Without 348.29.600







OPTIONAL ACCESSORIES
Pages 367-368, 403-417

Cruciform mounting plate, 4 point fixing





- > For TIOMOS click on fixing hinges only
- > Hospa screw fixing
- > Two part plate with ± 2 mm height adjustment via worm screw
- > Nickel-plated steel
- > Order fixing screws separately
- > Order qty: 1 pc




Height Hospa screw 0 mm 348.38.511

Protective wheel for corner cabinets

on pages 364-366





- > Protects front of the door next to corner cabinet
- > Prevents scratches and defects
- > Includes receiver for locking the front, preventing dropping of cabinet door
- > Order qty: 1 pc

Finish Cat. No.
White 542.59.799