


5321

- Load rating up to 160 kg
- 100%+ extension
- 19.1mm slide thickness
- Hold-in

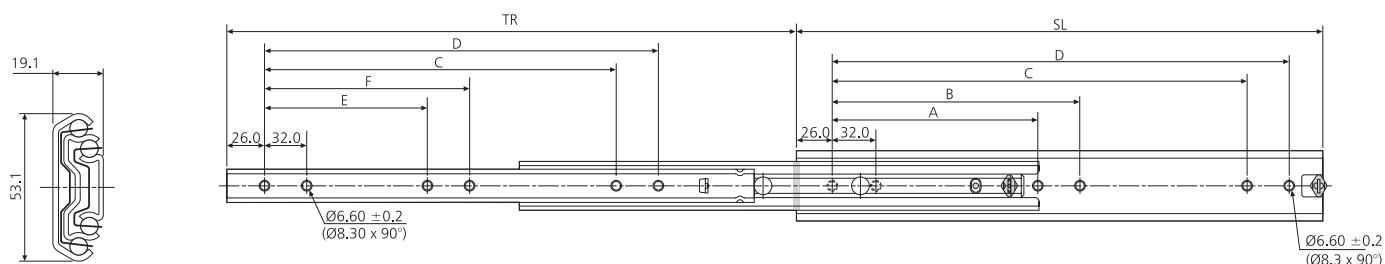

5321	mm								kg	
	SL	TR	A	B	C	D	E	F	W	L
DZ5321-0030	300	323.5	-	-	192	224	-	-	1.80	120
DZ5321-0035	350	373.5	-	-	224	256	-	-	2.07	130
DZ5321-0040	400	423.5	160	192	288	320	128	160	2.37	140
DZ5321-0045	450	473.5	160	192	320	352	128	160	2.70	150
DZ5321-0050	500	523.5	192	224	384	416	160	192	3.00	160
DZ5321-0055	550	573.5	192	224	416	448	160	192	3.31	150
DZ5321-0060	600	623.5	256	288	480	512	192	256	3.62	130
DZ5321-0070	700	723.5	288	320	576	608	256	288	4.26	110
DZ5321-0080	790	803.5	352	384	672	704	320	352	4.80	100
DZ5321-0090	900	923.5	448	480	768	800	384	416	5.57	80
DZ5321-0100	1000	1023.5	480	512	864	896	448	480	6.19	70
DZ5321-0110	1100	1123.5	544	576	992	1024	480	512	6.81	60

Notes:

- Load ratings for this product are based on a 60000 cycle dynamic test (DZ5321-0050)
- Fixing recommendation: M5 countersunk/ 6mm Euro screw